

Section Handling solution



Water Bath-Slide Drier Workstation

XW-TK7211



Slide Drying Hotplates

XWT-A



Water Baths

XWP-A

■ Service Coverage
■ Xiuwei Headquarter



Superior Quality .Excellent Service

We have a comprehensive customer service system and have established service organizations on different continents. If any problems or technical support are required, Xiuwei will provide service, in accordance with the customer, in a timely manner.

Guangzhou Xiuwei Technology Co.,Ltd

Tel: 020-31031012

Fax: 020-31031013

Add.:R114-115, Building No.15,No.644 ShiBei Indust Road,Panyu
Guangzhou,China,511440

E-mail:gzxixuwei@126.com

Web: www.xwlabware.com www.gzxixuwei.cn

Water Baths



XW-1003

Feature

- Adopting removable glass tank as water container, easy to change water. High efficiency cast aluminium heating plate, safe operation
- High brightness underwater LED lighting system, the slices can be clearly seen in the water. Clearly visible, speeding up the work efficiency
- High precision microcomputer control, accurate temperature control



XW-1001

Feature

- Made of specially treated aluminium pans, highly efficient cast aluminium heating plate, safe operation
- Equipped with transparent glass cover, blocking the dust
- Temperature control accurate to + or - 1°C at 40°C



XW-TP01

Feature

- High-definition colour touch screen
- Precise temperature control by computer, fast and smooth heating, small error.
- Timer on/off function
- Memory function: automatically retain the set temperature after running.
- Unique timer reminder function, set any length of time.
- Buzzer alarm when time is up.
- High-temperature-resistant, large-capacity glass bowl with low-voltage LED lighting at the bottom, safe and energy-saving and clear display of slices.
- Dual computer and physical temperature control protection system to avoid overheating

Item NO.	XW-1003	XW-1001	XW-TP01
Temperature range	Rt ~ 99°C	Rt ~ 99°C	Rt ~ 99°C
Temperature accuracy	±1°C	±1°C	±1°C
Heating power	480W	450W	450W
Temperature range	Ambient temperature: 5C-40C Relative humidity <80%		
Voltage	AC220V 50Hz	AC220V 50Hz	AC220V 50Hz



XWP-A

Feature

- Black special backing coating, easy to see the section underwater.
- Laminating heating principle, fast heating speed, 10 minutes to reach the set temperature quickly.
- High precision microcomputer control, accurate temperature control.
- Digital display control screen, intuitive reading, easy to operate.

Parameter

Temperature range	Rt ~ 99°C	Overall Dimensions	310x380x105mm
Temperature accuracy	±1°C	Water bath dimensions	230x180x53mm
Heating power	3000W	Weight	3.5kg
Temperature range	Ambient temperature: 5C-40C, Relative humidity <80%		
Voltage	AC220V 50Hz		




Slide Drying Hotplates


Suitable for drying tissue sections of plants, animals and humans in histopathology, biology, morphology, chemistry, clinical and bacteriological laboratories.



XW-2001

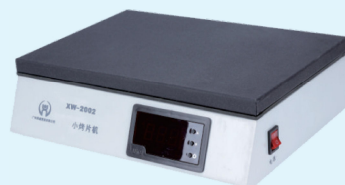

XW-2002

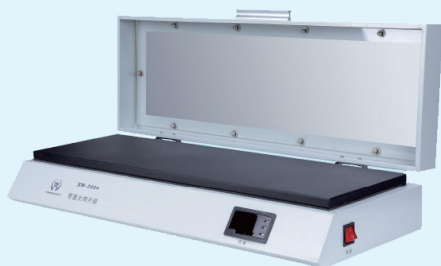

XW-2004



XW-2005

Item NO.	XW-2001	XW-2002	XW-2004	XW-2005
Cover lid			√	√
Power	200W	100W	200W	100W
Working area	100*640mm	85*260mm	100*640mm	85*260mm
Temperature range	RT+5°C~75°C	RT+5°C~75°C	RT+5°C~75°C	RT+5°C~75°C
Temperature accuracy	±2°C	±2°C	±2°C	±2°C
Capacity	75 slides	30 slides	75 slides	30 slides
Voltage	AC220V/50Hz	AC220V/50Hz	AC220V/50Hz	AC220V/50Hz
Oven			√	√



XW-KP02

Feature

- Hd color touch screen, easy to operate
- Computer precision temperature control, fast and stable heating
- Timing switch function
- Computer and physical dual temperature control and protection system, to avoid excessive temperature, damage tissue section



XWT-A

Feature

- High efficiency cast aluminum heating plate, high precision microcomputer control composition
- Film heating, energy saving loss, short heating time
- The special black back and bottom coating is anti-corrosion and anti-scratch
- The aluminum surface conducts heat quickly



XW-2003

Feature

- Stable TEFLON coating
- Digital display with LCD
- Double temperature protection
- High thermal conductivity



TK-2111

Feature

- Digital display temperature
- Clear display with high resolution
- It has good anti-interference and can control the temperature accurately
- With dual temperature protection, monitoring heating temperature makes it safer and more reliable
- Transparent Plexiglass cover for dustproof (optional)

Item NO.	XW-KP02	XWT-A	XW-2003	TK-2111
Power	AC220V/50Hz	AC220V/50Hz	AC220/50Hz	220±10V 50Hz
Heating power	200VA±10%	300W	230W	230W
Temperature range	RT-99°C	RT-99°C	RT-99°C	RT-99°C
Temperature accuracy	±1°C	±1°C	±1°C	±1°C
Capacity	56 slides	60 slides	60 slides	65 slides

Water Bath-Slide Drier Workstation

XW-TK7211

Parameter

Dimensions:510mm*335mm*225mm

Voltage:AC220V+10%,50Hz+1Hz

Power: 800 va

Temperature range of:
floating bath: 0°C ~99°C
slide dryer:0°C ~99°C

oven: 0°C ~99°C

Dimension:

floating bath:180*135*75mm

slide dryer:180*135*75mm

oven: 220*100*95mm



Feature

- Digital display control screen, allow independent temperature control
- Computer accurate temperature control, rapid and stable temperature rise
- Timing switch setting, can be arbitrarily set 0-99 minutes
- Computer and physical dual temperature control avoid excessive temperature, damage to tissue section



XW-2016

Parameter

For floating bath part

- Independent power control, temperature, with periodic reminder function
- With LED light for better observe
- Temperature range: RT+5~85°C
- Temperature accuracy:1°C
- Heating power: 450 W
- Pyrex bowl size:230*230*50mm
- With alarm lamp

For slide drier part

- Independent power control, temperature, with periodic reminder function
- Constant temperature range: RT+5~85C
- Temperature control accuracy: +1C
- Heating power: 400 W
- Panel size:250*230mm
- Capacity: 45 slides
- Voltage: AC220V 50Hz

www.xwlabware.com

XW-TK7218

Feature

- Hd color touch screen
- Computer precision temperature control, fast and stable heating
- Timing switch setting
- Tissue bath, slide dryer can be heated separately switch
- Regular reminder function
- Computer and physical dual temperature control and protection system, to avoid excessive temperature, damage tissue section

Parameter

Over All Dimensions:550*375*180mm

Voltage: AC220V+10%,50Hz+1Hz

Power: 700 va

Temperature setting range of:

Water bath: room temperature -99°C

Slide dryer: room temperature -99°C

Oven: room temperature -99°C

Dimension:

Water bath:210*168*55mm

Slide dryer: 206*170*55mm

Oven:230*95*105mm

